

LOOM & WIRE SHEATHING PROTECTOR

General Purpose Black Convuluted Poly Split Loom

Split for easy wire insertion. Temperature range -40°F to 200°F. Available in sizes of 1/4" to 2" I.D.



Product #	I.D.	Package Quantity
E71676XXBK	1/4"	50 FT Length Handy Roll
E71676250BK	1/4"	250 FT Length Packaged
E71676BULK	1/4"	3200 FT Bulk Carton
E71677XXBK	3/8"	50 FT Length Handy Roll
E71677250BK	3/8"	250 FT Length Packaged
E71677BULK	3/8"	1900 FT Bulk Carton
E71678XXBK	1/2"	50 FT Length Handy Roll
E71678250BK	1/2"	250 FT Length Packaged
E71678BULK	1/2"	1100 FT Bulk Carton
E71681XXBK	5/8"	50 FT Length Handy Roll

Product #	I.D.	Package Quantity
E71681BULK	5/8"	800 FT Bulk Carton
E71679XXBK	3/4"	50 FT Length Handy Roll
E71679250BK	3/4"	250 FT Length Packaged
E71679BULK	3/4"	550 FT Bulk Carton
E71680XXBK	1"	50 FT Length Handy Roll
E71680BULK	1"	300 FT Bulk Carton
E71684XXBK	1-1/4"	50 FT Length Handy Roll
E71684BULK	1-1/4"	250 FT Bulk Carton
E71685BULK	1-1/2"	150 FT Bulk Carton
E71686BULK	2"	100 FT Bulk Carton

Black High Temperature Nylon Split Loom

Marked with grey stripe and suitable for high heat environments such as engine compartments, etc. Temperature range -40°F to 300°F. Available in size ranges from 1/4" to 2" I.D.

Product #	I.D.	Package Quantity
E71876BULK	1/4"	3200 FT Bulk Carton
E71877BULK	3/8"	1900 FT Bulk Carton
E71878BULK	1/2"	1100 FT Bulk Carton
E71881BULK	5/8"	800 FT Bulk Carton
E71879BULK	3/4"	550 FT Bulk Carton
E71880BULK	1"	300 FT Bulk Carton
E71884BULK	1-1/4"	250 FT Bulk Carton
E71885BULK	1-1/2"	150 FT Bulk Carton
E71886BULK	2"	100 FT Bulk Carton



Clear Poly Loom Tubing

Natural smooth polyethylene thin wall loom tubing provides neat appearance and visual inspection of wire contents. Temperature rated to 176°F. **** May Be Subject To Minimum Order Quantities ****




Product # E719716XCL 7/16" I.D. x .487" O.D. x 500 FT Roll

LOOM & WIRE SHEATHING PROTECTOR

Braided Flexible Semi-Rigid Wrappable Split Tube

Flexo F6 lateral split tubing provides east cost effective installation. More flexible than convoluted loom or spiral wraps, suitable for high vibration applications, 25% edge overlap, cut and abrasion resistant, retains shape and rigidity throughout usable temperature range of -75°C to 125°C (-103°F to 257°F). Melt point 230°C (446°F). The 10 mil pet braid is lightweight, quiet and flexible. Stocked in black but also available in orange and clear/white on special order.


Product #	Nominal Size	Wall Thickness	Length
E71720XXBK	1/8"	.024"	100 FT Shop Spool
E71720BULK	1/8"	.024"	400 FT Bulk Spool
E71721XXBK	1/4"	.025"	100 FT Shop Spool
E71721BULK	1/4"	.025"	200 FT Bulk Spool
E71722XXBK	1/2"	.025"	75 FT Shop Spool
E71722BULK	1/2"	.025"	150 FT Bulk Spool
E71723XXBK	3/4"	.025"	50 FT Shop Spool
E71723BULK	3/4"	.025"	100 FT Bulk Spool
E71724XXBK	1"	.038"	50 FT Shop Spool
E71724BULK	1"	.038"	100 FT Bulk Spool
E71725XXBK	1-1/2"	.038"	25 FT Shop Spool
E71725BULK	1-1/2"	.038"	75 FT Bulk Spool
E71726XXBK	2"	.038"	25 FT Shop Spool
E71726BULK	2"	.038"	75 FT Bulk Spool

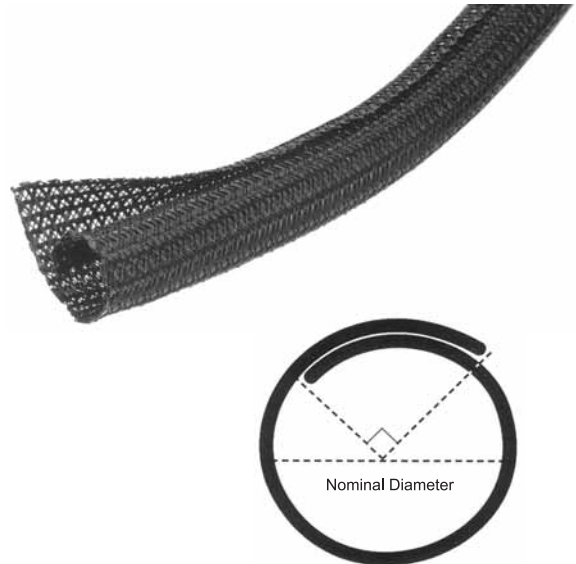

Dura Wrap Harsh Environment Nylon Protective Sleeve

Flexible sleeve is made from tightly woven ballistic nylon with an industrial strength hook and loop closure. Excellent for applications to secure or protect wires, hoses, cables, chains, hydraulics, etc. Thanks to the lateral split no disassembly of equipment is required. High strength sleeving helps contain high pressure fluids in the event of hose rupture. Sleeving wall thickness of .026" with 1" wide hook and loop closure. **** Bulk Spools Are Also Available. Please Contact Our Sales Department With Your Requirements ****

Product #	Nominal Size	Length
E71424XXBK	1"	25 FT Shop Spool
E71425XXBK	1-1/2"	25 FT Shop Spool
E71426XXBK	2"	25 FT Shop Spool
E71427XXBK	2-1/2"	25 FT Shop Spool
E71428XXBK	3"	25 FT Shop Spool
E71429XXBK	3-1/2"	25 FT Shop Spool
E71430XXBK	4"	25 FT Shop Spool
E71431XXBK	4-1/2"	25 FT Shop Spool
E71432XXBK	6"	25 FT Shop Spool

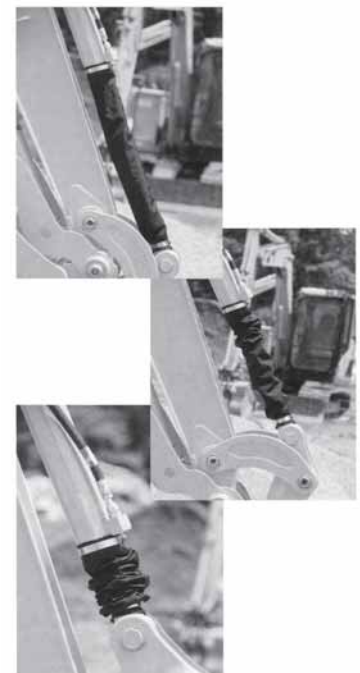

LOOM & WIRE SHEATHING PROTECTOR

Spiral Wrap Loom

Black UV resistant polyethylene spiral wrap provides a quick solution to protect bundled wiring and provide easy wire breakout. Sold in rolls of 100 FT. Temperature range -30°F to 165°F.



Product #	I.D.	Wall Thickness	Min/Max Bundle Range
E71804XXBK	1/8"	.035"	.063" - .500"
E71806XXBK	1/4"	.045"	.188" - 2"
E71808XXBK	3/8"	.052"	.313" - 3"
E71810XXBK	1/2"	.062"	.375" - 4"
E71812XXBK	5/8"	.062"	.625" - 4.5"
E71814XXBK	3/4"	.065"	.750" - 5"
E71816XXBK	1"	.070"	1" - 7"

Fiber Loom

Black asphalt compound impregnated fiber loom withstands abrasion and excellent moisture protection. Maximum temperature range 275°F sold in rolls of 100 FT.

Product # E71586XXBK 1/4" I.D.

Product # E71588XXBK 3/8" I.D.

Product # E71590XXBK 1/2" I.D.



Tubing & Loom Cutter

Use for cutting PVC, polyethylene, nylon tubing and loom plus heat shrink tube products. Provides precise burr free cuts. Replaceable blade.

Product # E7869826 Cutter Tool

Product # E7869825 Replacement Blade Only



E7869825



E7869826

Split Loom / Braided Flexo F6 Installation Tool

Quick and easy installations of wiring into lateral split tubing is accomplished by loading and sliding along the split line. As the tool travels along the sleeving it deposits the wires and allows closure to the tube.

Product # E7869828 1/4" & 3/8" Tube Size

Product # E7869829 1/2" & 5/8" Tube Size

Product # E7869830 3/4" Tube Size

Product # E7869831 1" & 1-1/4" Tube Size

Product # E7869832 1-1/2" & 2" Tube Size

