



TANDEM FENDERS

Spray Mate Polypropylene Full Round Fender Set

High density polypropylene is strong yet light weight. Colour stabilized with UV additive for fade resistance. Service temperature - 40°C to + 55°C. Minimum tire diameter is 35.2" and maximum tire diameter is 41.78". Includes 2 fenders, support brackets, and attaching fasteners.

**** Mount Kits & Brush Strips Sold Separately ****




- Product # R2903101520 Black
- Product # R2903101524 White
- Product # R2903101528 Navy Blue
- Product # R2903101529 Red



Offset Mount Kit

Use with Spray Mate Fenders. *Kit contains components to mount one fender.*




- Product # R2903100883 Black E-Coat Steel
- Product # R2903100886 Stainless Steel

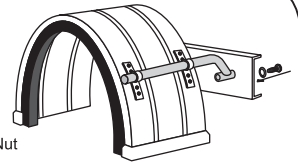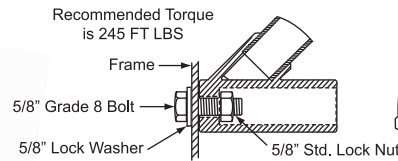

Straight End Mount Kit

Use with Spray Mate Fenders. Standard straight mount is of flush design that fastens to chassis rail with 5/8" bolt which allows for increased bearing surface. Mount is 30.25" long for added strength and durability. *Kit contains components to mount one fender.*


- Product # R2903101250 Black E-Coat Steel
- Product # R2903101251 Stainless Steel

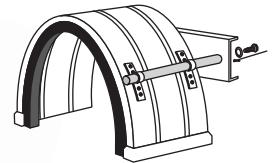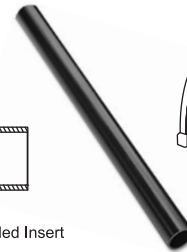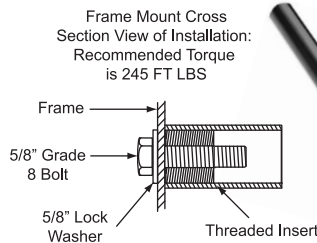

Spray Mate Curved Spray Suppressant Brush Kit

Use with Spray Mate Fenders. Spray suppressant skirt kit includes two black curved nylon brushes with stainless steel retainer and self tapping screws. *This kit will equip two fenders.*

- Product # R2903101536

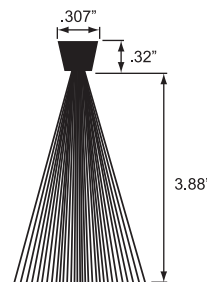

Pomar also offers a complete range of tandem fenders plus mounting accessories in aluminum, steel, and polished stainless steel. Contact us for your half tandem, single radius full tandem, double radius full tandem, and full round fender needs.

TANDEM FENDERS

Spray Master Polypropylene Full Round Fender Set

Injection molded high density polypropylene is colour stabilized with UV additive for fade resistance. Integrally molded ribs for added strength and spray reduction. Service temperature - 40°C to + 66°C. Utilizes unique slidetrax clamp system which allows up to 7" of adjustment. Minimum tire diameter is 28" and maximum tire diameter 32.6". Includes 2 fenders, 8 slidetrax clamps, 4 reflectors and stainless attaching fasteners.





**** Multi-Mount Kits & Brush Strips Sold Separately ****

Product # R2903101539 Black

Product # R2903101540 Silver/Grey

Product # R2903101541 White

Product # R2903101548 Red

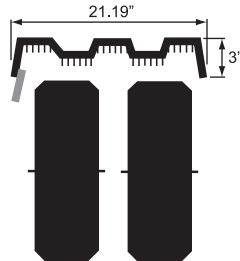


Multi-Mount Set

Use with Spray Master Fenders. Allows offset adjustability an extra 2" to 5" from tube centerline to centerline of chassis mount in quarter inch increments. **Kit contains components to mount one fender.**

Product # R2903101284 Black E-Coat Steel

Product # R2903101285 Stainless Steel

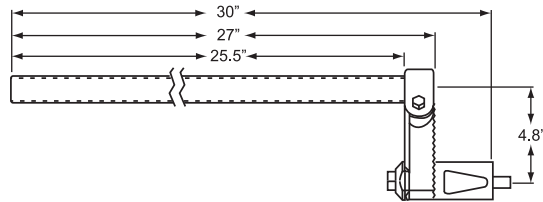


Master Mount Set

Use with Spray Master Fenders. Standard straight mount utilizes 1-3/8" HD tube with casting and mounts to chassis rail with a bolt which provides a stronger method of attachment. **Kit contains components to mount one fender.**

Product # R2903101282 Black E-Coat Steel


Product # R2903101283 Stainless Steel

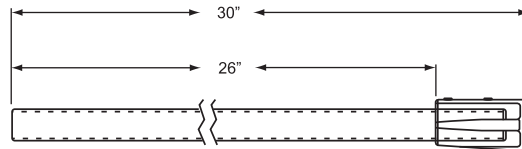

Spray Master Curved Spray Suppressant Brush Kit

Use with Spray Master Fenders. Spray suppressant kit includes two black curved nylon brushes with stainless steel retainer and self tapping screws. **This kit will equip two fenders.**

Product # R2903101537

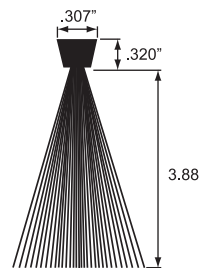

Pomar also offers a complete range of tandem fenders plus mounting accessories in aluminum, steel, and polished stainless steel. Contact us for your half tandem, single radius full tandem, double radius full tandem, and full round fender needs.