


# PANEL BUSHINGS & ELECTRICAL TAPES

## Panel Bushings

Black nylon panel bushings smooth sharp and rough edges in thin gauge material holes to prevent abrasion to wires and hoses. Two styles are available: Standard, for insertion in panel before pass through material and Split, which due to split design will allow insertion to panel after assembly.

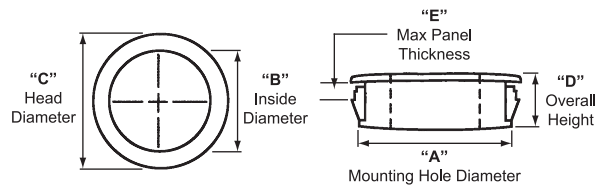

**\*\* If You Require Rubber Grommets Rather Than Panel Bushings, Check Out Our Rubber Grommets Page Located In Our Rubber Products Section \*\***

## Standard Grommet Style Snap Bushings

Sizes up to .875" hole packaged in 1000 piece packs, 1" and over packaged in 500 piece packs. Sold in full packs only.

Product #	"A"	"B"	"C"	"D"	"E"	Product #	"A"	"B"	"C"	"D"	"E"
E71SB2502	.250"	.125"	.312"	.312"	.062"	E71SB8751	.875"	.687"	.953"	.453"	.125"
E71SB3754	.375"	.250"	.468"	.406"	.125"	E71SB1000	1.00"	.766"	1.125"	.453"	.125"
E71SB5005	.500"	.312"	.578"	.406"	.125"	E71SB1250	1.25"	1.00"	1.31"	.453"	.125"
E71SB6255	.625"	.500"	.703"	.531"	.280"	E71SB1375	1.375"	1.00"	1.468"	.453"	.125"
E71SB6258	.625"	.500"	.718"	.406"	.125"	E71SB1500	1.50"	1.125"	1.609"	.453"	.125"
E71SB7509	.750"	.562"	.843"	.406"	.125"						



## Split Panel Snap Bushings - Open/Closed

Sold in full package quantities of 1000 pieces per size.



Product #	"A"	"B"	"C"	"D"	"E"
E712865	.375"	.265"	.421"	.390"	.125"
E712871	.500"	.312"	.562"	.406"	.125"
E712874	.625"	.453"	.687"	.406"	.125"
E712875	.750"	.546"	.796"	.406"	.125"
E712876	.875"	.671"	.921"	.406"	.125"
E712877	1.00"	.812"	1.047"	.406"	.125"

## General Use Electrical Tape

3M™ Temflex 7 mil thick vinyl general use electrical tape. 3/4" x 60 FT x .007" Thick. Can be applied down to -10°C and has an operating range up to 80°C and is rated for use up to 600 volts. UL listed, CSA approved. Sold in single rolls, sleeves of 10 rolls or master cartons of 200 rolls.

Product # S4221X66BK



## Wrap'N Seal Adhesiveless Sealing Tape

Strong and durable rubber construction bonds without adhesive by stretching onto itself and forming a fused waterproof and insulating covering. Versatile product has a multitude of uses from repairing cables and conduits to low pressure liquid lines. Suitable for applications not more than 600 volts and for service temperature up to 80°C. Sold in rolls of 3/4" Wide x 22 FT Long x .030" Thick. UL listed.

Product # S4275X22BK



## Liquid Electrical Tape

Quick dry formula liquid coating forms a waterproof barrier to electrical splices and connections. 118 ML (4 oz) can with applicator brush in lid. Colour: black.

Product # E7969998

